



4002ALM-6

24VDC DUAL TRIP AMPLIFIER

- Wide Range of Configurable Inputs
- Configurable Trip Action and Failsafe Modes
- Isolated Re-Transmission
- Isolated Input Stage and Isolated Transmitter Supply
- LED display of Input, Setpoints and Configuration



Description

The 4002-ALM trip-amplifier can accept a wide range of inputs including 4-20mA, thermocouple, RTD and voltage types. The unit can have up to two relay outputs and each can operate as a high or low trip. The unit also produces an isolated high level output.

The relay outputs are single pole change-over relays with mains voltage rating. Each trip can be configured so that the alarm condition can be above or below the setpoint. The relays can be energised or de-energised in the alarm condition, satisfying fail-safe and non-fail safe applications. In addition the alarm LED's can be selected to light when the relay is either on or off.

The input stage can be isolated as an option and the inputs can be user-reconfigured for several different ranges if specified at point of order. In addition there is an optional isolated transmitter supply of 24Vdc, suitable for exciting most standard transmitters.

The following applications are also possible:

One output relay is energised when the input reaches the high setpoint and is latched on until the lower setpoint is reached. The reverse operation is also possible. This is ideal for applications such as pumping out.. All the above options are user-configurable but can be specified at point of order. The power supply is 24Vdc.

Inputs

The input types and ranges included below are our standard ones only. Contact Sales for others.

4002-ALM-6 for DC Current and Voltage

0-20mA, 4-20mA, 0-10mA into 15Ω / 30Ω

0-1V, 0-10V, 1-5V into 100kΩ / 1MΩ

Min and Max Full Scale Ranges:

DC Current 0 to 1mA 0 to 5A

DC Voltage 0 to 100mV 0 to 300V

Note: For input voltages greater than 60Vdc a Divider unit must be specified.

4002-ALM-6 for Thermocouples

Types E,J,K,N,R,S,T & B linearised or non-linearised

Ranges Wide range of inputs

Auto cold junction compensation.

Upscale or downscale t/c burnout options.

4002-ALM-6 for Resistance Thermometers

2, 3 or 4 wire PT100 or PT1000, linearised (or not)

Ranges Wide range of inputs (Up or downscale b/o)

Outputs

Mains Rated Relays

3A resistive at 240V ac

DC Current and Voltage


0-20mA, 4-20mA, 0-10mA into 750Ω

0-1V, 0-10V, 1-5V into a minimum 2kΩ



Performance Characteristics

Parameter	Min	Typ	Max	Comments
Supply Voltage	16V	24V	30V	Options: 24Vdc
Supply Current	24mA		110mA	24V Supply, (Max if both relays energised)
Input Impedance (Volt)		1M Ω		
Input Impedance (mA)		15 Ω		
Volt drop (mA input)		3V		At 20mA input on 0-20mA range
Temp Coefficient			$\pm 100\text{ppm}/^\circ\text{C}$	
Relay Response Time		10ms		
Operating Ambient	0 $^\circ\text{C}$		55 $^\circ\text{C}$	
Relative Humidity	0%		90%	
Isolation Voltage	1kV			
Surge Voltage	2.5kV for 50 μs			Transient of 10kV/ μs
Notes	Setpoints are configured on the LED display on the front panel. H/H, H/L, L/H, LL, fail-safe, non-fail-safe and hysteresis options are set using the display. The process input level is shown on the 4 digit LED Display Figures based on 24Vdc supply, 20 $^\circ\text{C}$ ambient			

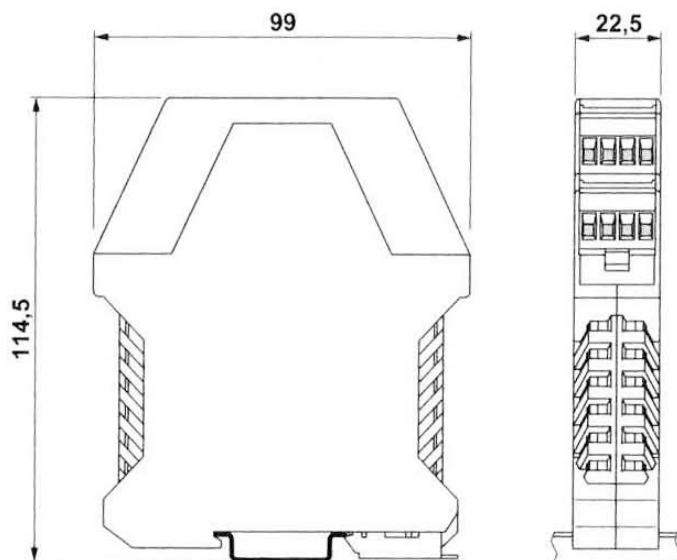

Installation Data

Mounting	DIN Rail TS35
Orientation	Any
Connections	Screw Clamp with pressure plate
Conductor size	0.5-4.0mm
Insulation Stripping	12mm
Weight	Approx 140g

Connection Details

3.	Tx Supply +ve, RTD 4 th Wire	
5.	Input mA, V, T/C, RTD +ve	
4.	Input mA, V, T/C, RTD -ve	
6.	RTD 3 rd Wire	
10.	Output -ve	18. Relay 1 N/C
12.	Output +ve	19. Relay 1 N/O
		20. Relay 1 Common
1.	Power Input -ve	15. Relay 2 N/C
2.	Power Input +ve	16. Relay 2 N/O
		17. Relay 2 Common

Ordering Information

Please supply:

Part Number:	4002ALM-6
Input Type:	e.g mA, Volt, T/C, RTD
Input Range:	e.g 4-20, 0-10, 0-500 $^\circ\text{C}$
Trip Action 1:	e.g RLY1>SP1<LED1
Trip Action 2:	e.g RLY2<SP2>LED2
Power Supply:	e.g 24Vdc, 240Vac